

**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re the Application of:

Kalle TAMMI et al.

Application No.: New Application

Filed: Concurrently Herewith

Attorney Dkt. No.: 59643.00385

For: USER REGISTRATION IN A COMMUNICATION SYSTEM

**CLAIM FOR PRIORITY UNDER 35 USC § 119**

Commissioner for Patents  
P.O. Box 1450  
Alexandria, VA 22313-1450

March 31, 2004

Sir:

The benefit of the filing dates of the following prior foreign application filed in the following foreign country is hereby requested for the above-identified patent application and the priority provided in 35 U.S.C. §119 is hereby claimed:

**Patent Application No. 0329857.7 filed on December 23, 2003 in Great Britain**


In support of this claim, a certified copy of said original foreign application is filed herewith.

It is requested that the file of this application be marked to indicate that the requirements of 35 U.S.C. §119 have been fulfilled and that the Patent and Trademark Office kindly acknowledge receipt of this document.

**THIS PAGE BLANK (USPTO)**

Please charge any fee deficiency or credit any overpayment with respect to this paper to Counsel's Deposit Account No. 50-2222.

Respectfully submitted,



---

Douglas H. Goldhush  
Registration No. 33,125

**Customer No. 32294**  
SQUIRE, SANDERS & DEMPSEY LLP  
14<sup>TH</sup> Floor  
8000 Towers Crescent Drive  
Tysons Corner, Virginia 22182-2700  
Telephone: 703-720-7800  
Fax: 703-720-7802

DHG:lls

Enclosure: Priority Document

**THIS PAGE BLANK (USPTO)**



INVESTOR IN PEOPLE

The Patent Office  
Concept House  
Cardiff Road  
Newport  
South Wales  
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

*W. Evans*

Dated 3 February 2004

THIS PAGE BLANK (USPTO)


2005/01/27

# Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road  
Newport  
South Wales  
NP9 1RH

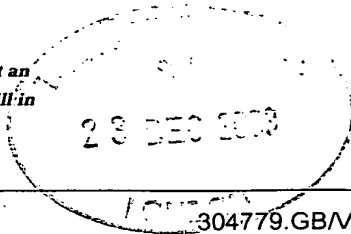

1. Your reference

304779.GB/VRD

2. Patent application number

(The Patent Office will fill in this part)

0329857.7

23 DEC 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Nokia Corporation  
Keilalahdentie 4  
02150 Espoo  
Finland

Patents ADP number (if you know it)

7652217006

If the applicant is a corporate body, give the country/state of its incorporation

A Finnish company

4. Title of the invention

USER REGISTRATION IN A COMMUNICATION SYSTEM

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE WHITE & FARRER  
54 Doughty Street,  
London WC1N 2LS,  
United Kingdom

Patents ADP number (if you know it)

1255003 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

Yes

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

## Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	13
Claim(s)	4
Abstract	1
Drawing(s)	3 <i>SN</i>

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)

Request for substantive examination (*Patents Form 10/77*)

Any other documents  
(please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date 23.12.2003

12. Name and daytime telephone number of person to contact in the United Kingdom

Mrs. V.R. Driver  
(020) 7831-7929

### Warning

*After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.*

### Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.*
- Write your answers in capital letters using black ink or you may type them.*
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.*
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.*
- Once you have filled in the form you must remember to sign and date it.*
- For details of the fee and ways to pay please contact the Patent Office.*



## USER REGISTRATION IN A COMMUNICATION SYSTEM

The present invention relates to user registration in a communication system.

A diverse range of communication systems are in use today enabling communication between two or more entities, such as user equipment and/or other nodes associated with the system. Such systems may comprise, for example, communication of voice, data, and multimedia data.

Communication systems providing wireless communication for user terminals or other nodes are known. An example of a wireless system is a public land mobile network (PLMN). A PLMN is typically a cellular network wherein a base transceiver station (BTS) or similar access entity serves user equipment (UE) such as mobile stations (MS) via a wireless interface. The operation of the apparatus required for the communication is usually controlled by one or more control entities, which themselves may be interconnected. One or more gateway nodes provide for connecting the PLMN to other networks. Examples of other such networks are another cellular network, a public switched telephone network (PSTN) and packet switched data networks such as an IP (Internet Protocol) based network. The communication between the user equipment and the other elements of the communication system are based on an appropriate communications protocol, which defines the "rules" under which communication is handled in the system.

In the current third generation (3G) wireless system, there are defined various servers for the handling of different communication services for mobile users. These include servers that provide call state control functions, known as CSCFs. Control functions may also be provided by entities such as a home subscriber server (HSS) and various application servers (AS). The HSS is typically for permanently storing the user's (subscriber's) profile. For example, in the Release 5 architecture for 3G, as specified by the 3<sup>rd</sup> Generation Partnership Project (3GPP), these entities can be found located in the IP Multimedia Subsystem

(IMS). Call state control function provides a serving function S-CSCF, an interrogating function, I-CSCF and a proxy function P-CSCF.

The IMS network may sit at the hub of the 3G architecture, supporting an IP based network that handles both traditional voice telephony and multimedia services. The 3GPP has chosen Session Initiation Protocol (SIP) as a core session signalling protocol for 3G networks. SIP has been developed by the Internet Engineering Task Force (IETF). The 3GPP specification 24.229 describing the IMS network basic operation from an SIP perspective can be found at [http://www.3gpp.org/ftp/Specs/latest/Rel-5/24\\_series/24229-560.zip](http://www.3gpp.org/ftp/Specs/latest/Rel-5/24_series/24229-560.zip). It should be noted that SIP is a request/response style protocol, in the sense that for every message sent from a source, there is an associated response from the destination confirming receipt of the sent message.

Users are registered with S-CSCFs according to location and available communication links. The interrogating serving call state control function (I-CSCF) is used to contact the S-CSCFs. When the S-CSCF which is the assigned S-CSCF for a user cannot be contacted by the I-CSCF, it is possible to assign a new S-CSCF for a user during the registration procedure. When this is done, it is possible that the home subscriber server HSS receives a multimedia authentication request (MAR) command including an S-CSCF name which is not the same as the previously assigned S-CSCF for the user. In the existing 3GPP protocol, the home subscriber server can deregister the registrations in the old S-CSCF by using the Registration-Termination-Request (RTR) command. By assigning the reason NEW\_SERVER\_ASSIGNED to this command, this causes the user's public identity which is registered in the new S-CSCF to be deregistered from the old S-CSCF. A subsequent RTR command must then be issued for the rest of the user's public identities with the deregistration reason set to SERVER\_CHANGE which causes the corresponding user data to be removed from the old S-CSCF and initiates a deregistration procedure for the user equipment UE to request the user equipment UE to re-register. The re-registration process is then directed by the I-CSCF to the new S-CSCF.

Thus, two individual command sets are required to implement the two necessary steps, that is the deregistration of the users' public identities from the previous S-CSCF and the re-registration of the public identities at the new S-CSCF.

It is an aim of the present invention to make this procedure more command-efficient.

According to one aspect of the present invention there is provided a method of reassigning user data in a communications system, the user data comprising a plurality of identities for each user, the method comprising the steps of: storing in a user information store the plurality of identities in association with a first serving controller, the plurality of identities being associated with respective registration statuses selected from a registered status and an unregistered status; detecting that the user has requested registration to a second serving controller using one of said identities; issuing a registration termination request identifying the or each identity, which has been newly assigned to the second serving controller as a result of the requested registration ; responsive to the registration termination request, i) issuing a re-registration notification to the user including the or each identity which has a registered status and which were not assigned to the second serving controller as a result of the requested registration, and ii) disassociating all identities of the said user from the first serving controller.

It will be clear that the re-registration notification causes any unassigned identities of registered status to be reassigned to the second serving controller. Unassigned identities of unregistered status need not be reassigned.

Another aspect provides a communications system comprising: a first serving controller; a user information store which holds for a user a plurality of identities in association with the first serving controller, the plurality of identities being associated with respective registration statuses selected from a registered status and an unregistered status; a second serving controller configured to transfer to

the user information store a user authentication request identifying the user; and wherein the user information store is operable to detect the user authentication request and comprises means for inserting into a registration termination request issued to the first serving controller the or each identity of that user, which were newly associated to the second serving controller as a result of the user authentication request, and wherein the first serving controller is operable, responsive to the registration termination request, to i) issue a re-registration notification to the user including the or each identity which has a registered status and which were not assigned to the second serving controller as a result of the user authentication request, and ii) disassociate all identities of the said user from the first serving controller.

Another aspect provides a serving controller for use in a system for providing communication between users, the first serving controller having an interface adapted to communicate with a user information store whereby a plurality of identities each with respective registration statuses associate a user with the serving controller and being operable, responsive to a registration termination request received from the user information store, to i) issue a re-registration notification to the user including the or each identity which has a registered status and which incorrectly associate the user with the first serving controller, and ii) disassociate all identities of the said user from the serving controller.

In one embodiment, multiple user equipment (equivalent to a private ID) may share one or more public identities or identity sets. For example, the help desk employees may share one common public identity SIP:helpdesk@example.com. Each employee may register/deregister independently, and the serving controller routes the SIP call request to available employees so that any of them may pick up the call. In addition, each user equipment may also have non-shared individual public identities. An aspect of the present invention can be applied in this context to ensure that the serving controller is the same for all the user equipments sharing the same identity/identities. Therefore, in one embodiment of the present invention, if any of the public identities of a sharing user equipment is

registered to a new serving controller, the serving controller is changed for all of those user equipments and their public identities. To achieve this, the registration termination request (RTR) initiates deregistration of all of those user equipments and corresponding public identities. To achieve this, when the serving controller receives a registration termination request, it can find out, based on locally stored information, if there are any public identities associated to the user equipment which are shared by another user equipment. If there is, the serving controller can start the deregistration procedure for all of those user equipments and their public identities.

In the 3GPP architecture, the user information store is constituted by the home subscriber server, but it will be appreciated that in other architectures a different database may be provided. Also, the first and second serving controllers are provided by the serving call state control functions in a 3GPP architecture, but again it will be appreciated that in a different architecture any suitable controller could perform this role.

The registration termination request can be an RTR command according to the known 3G protocol, or can be the equivalent or other suitable command in different protocols.

For a better understanding of the present invention and to show how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings, in which:

Figure 1 is a schematic diagram showing the environment in which an embodiment of the invention can be implemented;

Figure 2 is a schematic diagram illustrating the storage of user identities; and

Figure 3 is a schematic diagram illustrating the message flow.

Certain embodiments of the present invention will be described in the following by way of example, with reference to the exemplifying architecture of a third generation (3G) mobile communications system. However, it shall be appreciated that the embodiments may be applied to any suitable communication system.

Reference is made to Figure 1 which shows an example of a network architecture wherein the invention may be embodied. In Figure 1 an IP Multimedia Network (IMS) 45 is provided for offering IP multimedia services for IP Multimedia Network subscribers.

As described above, IP Multimedia (IM) functionalities can be provided by means of a mobile communication system. A mobile communication system is typically arranged to serve a plurality of mobile user equipment (UE) usually via a wireless interface between the user equipment and at least one base station of the communication system. The mobile communication system may logically be divided between a radio access network (RAN) and a core network (CN).

In the system a base station 31 is arranged to transmit signals to and receive signals from mobile user equipment 30 of a mobile user i.e. subscriber via a wireless interface between the user equipment and the radio access network. Correspondingly, the mobile user equipment is able to transmit signals to and receive signals from the radio access network via the wireless interface.

In the shown arrangement the user equipment 30 may access the IMS network 45 via the access network associated with base station 31, respectively. It shall be appreciated that, although, for clarity reasons Figure 1 shows a base station of only one radio access network, a typical communication network system usually includes a number of radio access networks.

The 3G radio access network (RAN) is typically controlled by appropriate radio network controller (RNC). This controller is not shown in order to enhance clarity. A controller may be assigned for each base station or a controller can control a

plurality of base stations, for example in the radio access network level.. It shall thus be appreciated that the name, location and number of the network controllers depends on the system.

The mobile user equipment 30 may comprise any appropriate mobile user equipment adapted for Internet Protocol (IP) communication to connect the network. For example, the mobile user may access the cellular network by means of a Personal computer (PC), Personal Data Assistant (PDA), mobile station (MS) and so on. The following examples are described in the context of mobile stations.

One skilled in the art is familiar with the features and operation of a typical mobile station. Thus, it is sufficient to note that the user may use a mobile station for tasks such as for making and receiving phone calls, for receiving and sending data from and to the network and for experiencing multimedia content or otherwise using multimedia services. A mobile station may include an antenna for wirelessly receiving and transmitting signals from and to base stations of the mobile communication network. A mobile station may also be provided with a display for displaying images and other graphical information for the user of the mobile user equipment. Camera means may be provided for capturing still or video images. Speaker means are also typically provided. The operation of a mobile station may be controlled by means of an appropriate user interface such as control buttons, voice commands and so on. Furthermore, a mobile station is provided with a processor entity and a memory means.

It shall be appreciated that although only one mobile station is shown in Figure 1 for clarity, a number of mobile stations may be in simultaneous communication with base stations of a mobile communication system.

The core network (CN) entities typically include various switching and other control entities and gateways for enabling the communication via a number of radio access networks and also for interfacing a single communication system

with one or more communication system such as with other cellular systems and/or fixed line communication systems. In the 3GPP systems the radio access network controller is typically connected to an appropriate core network entity or entities such as, but not limited to, a serving general packet radio service support node (SGSN) 33. The radio access network controller is in communication with the serving GPRS support node via an appropriate interface, for example on an Iu interface. Although not shown, the SGSN typically has access to designated subscriber database configured for storing information associated with the subscription of the respective user equipment.

The serving GPRS support node, in turn, typically communicates with a gateway GPRS support node (GGSN) 34 via the GPRS backbone network 32. This interface is commonly a switched packet data interface.

Figure 1 shows an application server (AS) 50. The user equipment 30 may connect, via the GPRS network, to the application server that is connected to one or more data networks such as, but not limited to, the exemplifying Internet Protocol (IP) network. It shall be appreciated that a great number of application servers may be connected to each data network.

The communication systems have developed in the direction wherein services are provided for the user equipment by means of various functions of the data network that are handled by controller entities, such as servers. For example, in the current third generation (3G) wireless multimedia network architectures it is assumed that several different servers providing various control functions are used for the service provision control. These include functions such as the call session control functions (CSCFs). The call session functions may be divided into various categories such as a proxy call session control function (P-CSCF), interrogating call session control function (I-CSCF), and serving call session control function (S-CSCF). It shall be appreciated that similar functions may be referred to in different systems with different names. For example, in certain applications the CSCFs may be referenced to as the call state control functions.



A user who wishes to use services provided by an application server via the IMS system may need first to register with a serving controller, such as the serving call session control function (S-CSCF1) 42. As shown in Figure 1, communication between the S-CSCF 42 and the user equipment 30 may be routed via at least one proxy call session control function (P-CSCF) 35 and an interrogating call session control function I-CSCF 36. The proxy CSCF 35 is thus for proxying messages from the GGSN 34 to a serving call session control function 42. The S-CSCF 42 in Figure 1, in turn, provides the control entity the user equipment 30 needs to be registered with. The registration is required to enable the user equipment to request a service from the communication system.

The system of Figure 1 is further arranged such that a user who has been provided with required communication resources by the backbone network and is registered to the S-CSCF 42 has to initiate the use of services offered by the application server 50 by sending a request for the desired service to the S-CSCF 42 over the communication system.

In Figure 1, another serving call session control function 43, S-CSCF2, is illustrated. In practice there will of course be a number of S-CSCFs.

A user information storage entity may also be provided for storing subscriber i.e. user related information. In the particular embodiment the storage entity is shown to be provided by means of a home subscriber server (HSS) 37. The home subscriber server (HSS) 37 can be queried by other function entities over the appropriate interfaces, e.g. during session set-up procedures and later. The subscriber information may include information such as data required for registration and authentication purposes (e.g. identities and registration status of the subscriber) and so on. The HSS 37 can also be used for storing permanently subscriber profile information. In particular, the home subscriber server holds information associating public identities with particular user equipment UE, and identifying the S-CSCF to which that UE is registered. Each UE is identified with

unique private identity, which has the form of Network Access Identifier, for example UE1@example.org.

Figure 2 shows by way of example the contents of the home subscriber server database 38. It will be appreciated that this is by way of example only and the precise layout and protocol will vary in accordance with the network requirements. Each user equipment UE may be associated with multiple public identities which are labeled Pid1 to Pid7 in Figure 2. The public identity is user's public address, which is used for communications within the IMS system. The public user identity can, for example, be in a form of SIP URI like sip: pid1@example.org. The public identities may be handled individually or they can be grouped to one or several public identity sets. The public identities may be shared by multiple UEs. Each individual public identity or a set of public identities are registered independently by each UE sharing them and they can have different services executed in the network. Each public identity can have a registered or unregistered status, which is dependent on the UE, and, when registered, is associated with a particular S-CSCF.

It is supposed to be the case that all public identities for a particular user equipment UE should be registered with the same S-CSCF. When multiple UEs share one or more public identities, all the public identities associated with those UEs have to be registered to the same S-CSCF. Sometimes circumstances occur (as described later) so that one of the public identities is registered with a different S-CSCF to the others. The following described embodiment takes care of such a situation in a command-efficient manner. This will now be described with reference to Figure 3.

In a 3G network, when a user first switches on his mobile terminal, he must register his user ID or address with the network before allowing the terminal to fully connect. This is done by sending an SIP 'REGISTER' message, which includes details of the user's address, from the terminal to the IMS. The IMS processes this information, via the serving call state control function (S-CSCF),

storing the relevant registration information at the HSS. This registration information may include the status of the user such as the location, terminal capability and user availability. The registration is acknowledged by the IMS through a suitable response message that is also in accordance with SIP. Subsequent registrations also take place ('re-REGISTER') whenever the preceding registration has expired, or when there is a change in the status of the user or another reason to refresh the registration.

If, in a registration procedure, the previously assigned S-CSCF does not respond to the register message sent from the I-CSCF after a timeout, a new S-CSCF is assigned for the user. In Figure 3, a failed registration request is shown as being transmitted from the user equipment UE1 to the first S-CSCF1, 42. A subsequent registration request in respect of the first public identity PID1 is shown having been successfully made to the second S-CSCF2, 43. However, in order to request authentication information and to inform the HSS the user equipment UE1 as having been registered in respect of S-CSCF2, the S-CSCF2 issues a Multimedia-Auth-Request (MAR) command which identifies the second S-CSCF2. The home subscriber server 37 receives the MAR command and, noticing that the command includes a different S-CSCF name than the previous one which had been stored, dispatches an RTR command towards the first S-CSCF1 via the Cx interface. The home subscriber server 37 inserts into the RTR command the deregistration reason NEW\_SERVER\_ASSIGNED, and also inserts the public identities belonging to the same implicitly registered set (Set 1) as the notified public identity Pid1. In this case, it will insert Pid1, Pid2 and Pid3. The home subscriber server inserts also the private identity of the UE1 into the RTR. When the first S-CSCF1 receives the RTR command with the deregistration reason assigned to the value NEW\_SERVER\_ASSIGNED it removes the user data of those public identities which are in the request and the user data of all other public identities, which are related to the same UE1, that is, to the same private identity. That is, it removes Pid1 - Pid6 as being associated with S-CSCF1. It also issues a NOTIFY message to the user equipment UE1 identifying the public identities/identity sets which had a registered status and which were not included

in the RTR command, and which have now been deregistered from S-CSCF1. The NOTIFY message contains an indication for the user equipment UE1 to re-register these public identities at the new S-CSCF2. It achieves this by performing a re-registration procedure as indicated in Figure 3, and as described above. Note that the public identities (Set 2) which are in an unregistered state at the first S-CSCF1 are removed, but no NOTIFY message is sent for those identities because there is no need to re-register them.

When removing the public identities of the UE1, the S-CSCF detects the shared public identity, in the example Pid6, and based on that, it removes all the user data, which is related to the sharing UE2. That is, it removes Pid6 – Pid7 as being associated with S-CSCF1. It also issues a NOTIFY message to the user equipment UE2 identifying the public identities/identity sets which had a registered status and which were not included in the RTR command, and which have now been deregistered from S-CSCF1. The NOTIFY message contains an indication for the user equipment UE2 to re-register these public identities at the new S-CSCF2. It achieves this by performing a re-registration procedure as indicated in Figure 3, and as described above. Note that the public identity 7 (Set 4) which is in an unregistered state at the first S-CSCF1 is removed, but no NOTIFY message is sent for that identity because there is no need to re-register it.

The above-described embodiment of the invention thus optimises an existing functionality of 3GPP IMS deregistration. In particular it optimises the Cx interface usage and the behaviour of the HSS in the deregistration procedure during the change of the assigned S-CSCF. This is achieved in the above described embodiment by carrying out the deregistration procedure of multiple public user identity sets and UEs with a single RTR command during the change of the S-CSCF. The reason NEW\_SERVER\_ASSIGNED indicates that the S-CSCF shall start the deregistration procedure (i.e. issue a notify message) towards the user equipment UE for the rest of the user's public identity/identity sets which are registered for that S-CSCF1 and which are not yet registered in

the newly assigned S-CSCF2. Another alternative is that a new reason value is introduced instead of using the existing reason NEW\_SERVER\_ASSIGNED. This might be necessary to guarantee the interworking between different releases of 3GPP IMS solutions.

Thus, only a single RTR/RTA command pair needs to be processed, instead of multiple pairs as in the existing 3G system.

It will readily be appreciated that the IMS network illustrated in Figure 1 may comprise further S-CSCFs, interrogating CSCFs and proxy CSCFs. Likewise, although embodiments of the present invention have been described in the context of 3G using SIP, other suitable systems and interface protocols could be used.

It is also noted herein that while the above-described exemplifying embodiments of the invention, there are several variations and modifications which may be made to the disclosed solution without departing from the scope of the present invention as defined in the appended claims.

## CLAIMS:

1. A method of reassigning user data in a communications system, the user data comprising a plurality of identities for each user, the method comprising the steps of:

storing in a user information store the plurality of identities in association with a first serving controller, the plurality of identities being associated with respective registration statuses selected from a registered status and an unregistered status;

detecting that the user has requested registration to a second serving controller using one of said identities;

issuing a registration termination request identifying the or each identity, which has been newly assigned to the second serving controller as a result of the requested registration;

responsive to the registration termination request, i) issuing a re-registration notification to the user including the or each identity which has a registered status and which were not assigned to the second serving controller as a result of the requested registration, and ii) disassociating all identities of the said user from the first serving controller.

2. A method according to claim 1, wherein the step of disassociating all identities of the said user from the first serving controller comprises removing the identities and their data from the first serving controller, and removing their association in the user information store with the first serving controller.

3. A method according to claim 1 or 2, wherein the plurality of identities include a set of unregistered status, and wherein the set is disassociated but not reassigned.

4. A method according to claim 1, wherein the registration termination request includes a deregistration reason.

5. A method according to claim 4, wherein the deregistration reason in a 3GPP communication system is NEW\_SERVER\_ASSIGNED.

6. A method according to claim 1, wherein the step of detecting that the user has requested registration comprises receiving at the user information store an authentication request.

7. A method according to claim 1, wherein at least two users have a shared identity and a non-shared identity and the method comprises the step of checking, when a non-shared identity has been newly assigned to the second serving controller, whether that user has a shared identity and, if so, issuing a re-registration notification to other users sharing the shared identity.

8. a communications system comprising:

a first serving controller;

a user information store which holds for a user a plurality of identities in association with the first serving controller, the plurality of identities being associated with respective registration statuses selected from a registered status and an unregistered status;

a second serving controller configured to transfer to the user information store a user authentication request identifying the user; and wherein the user information store is operable to detect the user authentication request and comprises means for inserting into a registration termination request issued to the first serving controller the or each identify of that user, which were newly associated to the second serving controller as a result of the user authentication request, and wherein the first serving controller is operable, responsive to the registration termination request, to i) issue a re-registration notification to the user including the or each identity which has a registered status and which were not assigned to the second serving controller as a result of the user authentication request, and ii) disassociate all identities of the said user from the first serving controller.

9. A communications system according to claim 8, wherein the user information store comprises a home subscriber server.
10. A communications system according to claim 8, wherein the serving controller comprises a call state control function.
11. A communications system according to claim 8, which is wireless.
12. A communications system according to claim 8, wherein said plurality of identities includes a shared identity which is associated with at least one user.
13. A communications system according to claim 12, wherein the first serving controller is operable to issue a re-registration notification to the at least one other user.
14. A serving controller for use in a system for providing communication between users, the first serving controller having an interface adapted to communicate with a user information store whereby a plurality of identities each with respective registration statuses associate a user with the serving controller and being operable, responsive to a registration termination request received from the user information store, to i) issue a re-registration notification to the user including the or each identity which has a registered status and which incorrectly associate the user with the first serving controller, and ii) disassociate all identities of the said user from the serving controller.
15. A serving controller according to claim 14, which is operable to disassociate all identities of the said user by removing the identities and their data in the serving controller and by removing their association in the user information store.
16. A serving controller according to claim 14 or 15, which is operable to read a deregistration reason in the registration termination request.



17. A serving controller according to claim 14, which is operable to issue a re-registration notification to any other users sharing the or one of the said identities.

AbstractUSER REGISTRATION IN A COMMUNICATION SYSTEM

A method of reassigning user data in a communications system, the user data comprising a plurality of identities for each user, the method comprising the steps of: storing in a user information store the plurality of identities in association with a first serving controller, the plurality of identities being associated with respective registration statuses selected from a registered status and an unregistered status; detecting that the user has requested registration to a second serving controller using one of said identities; issuing a registration termination request identifying the or each identity, which has been newly assigned to the second serving controller as a result of the requested registration; responsive to the registration termination request, i) issuing a re-registration notification to the user including the or each identity which has a registered status and which were not assigned to the second serving controller as a result of the requested registration, and ii) disassociating all identities of the said user from the first serving controller.

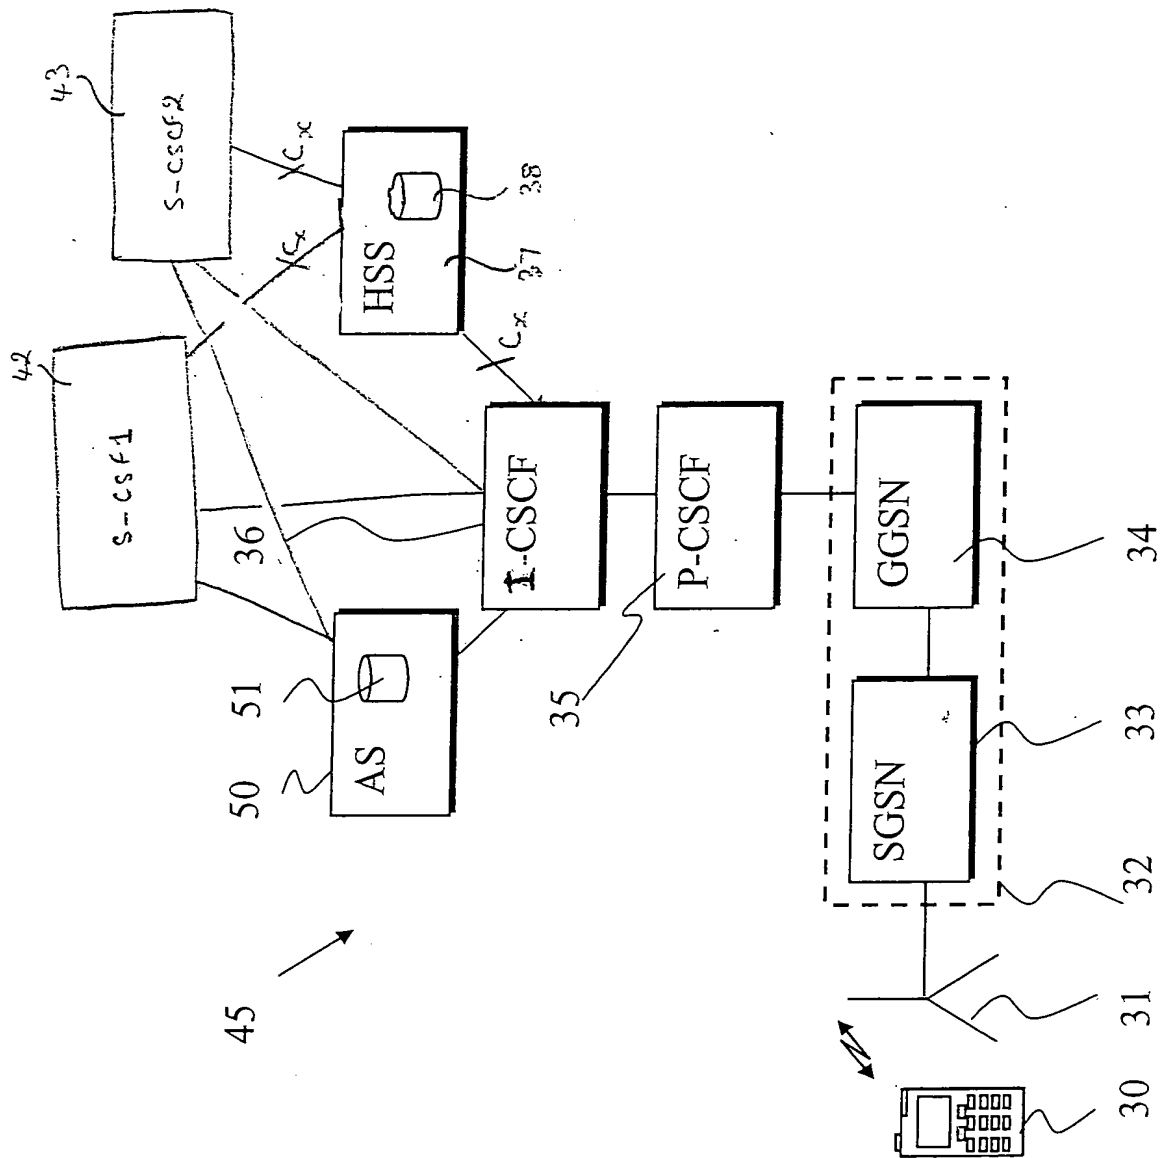


Fig. 1

**THIS PAGE BLANK (USPTO)**

figure 2

User ID	Public ID	Registration status	Location
UE 1	Pid1	Reg	S-CSCF1
	Pid2	Reg	
	Pid3	Reg	
	Pid4	Unreg	
	Pid5	Unreg	
UE 1 UE 2	Pid6	Reg Reg	
UE 2	Pid7	Unreg	

set 1

}

set 2

}

set 3


}

set 4

}

**THIS PAGE BLANK (USPTO)**

figure 3

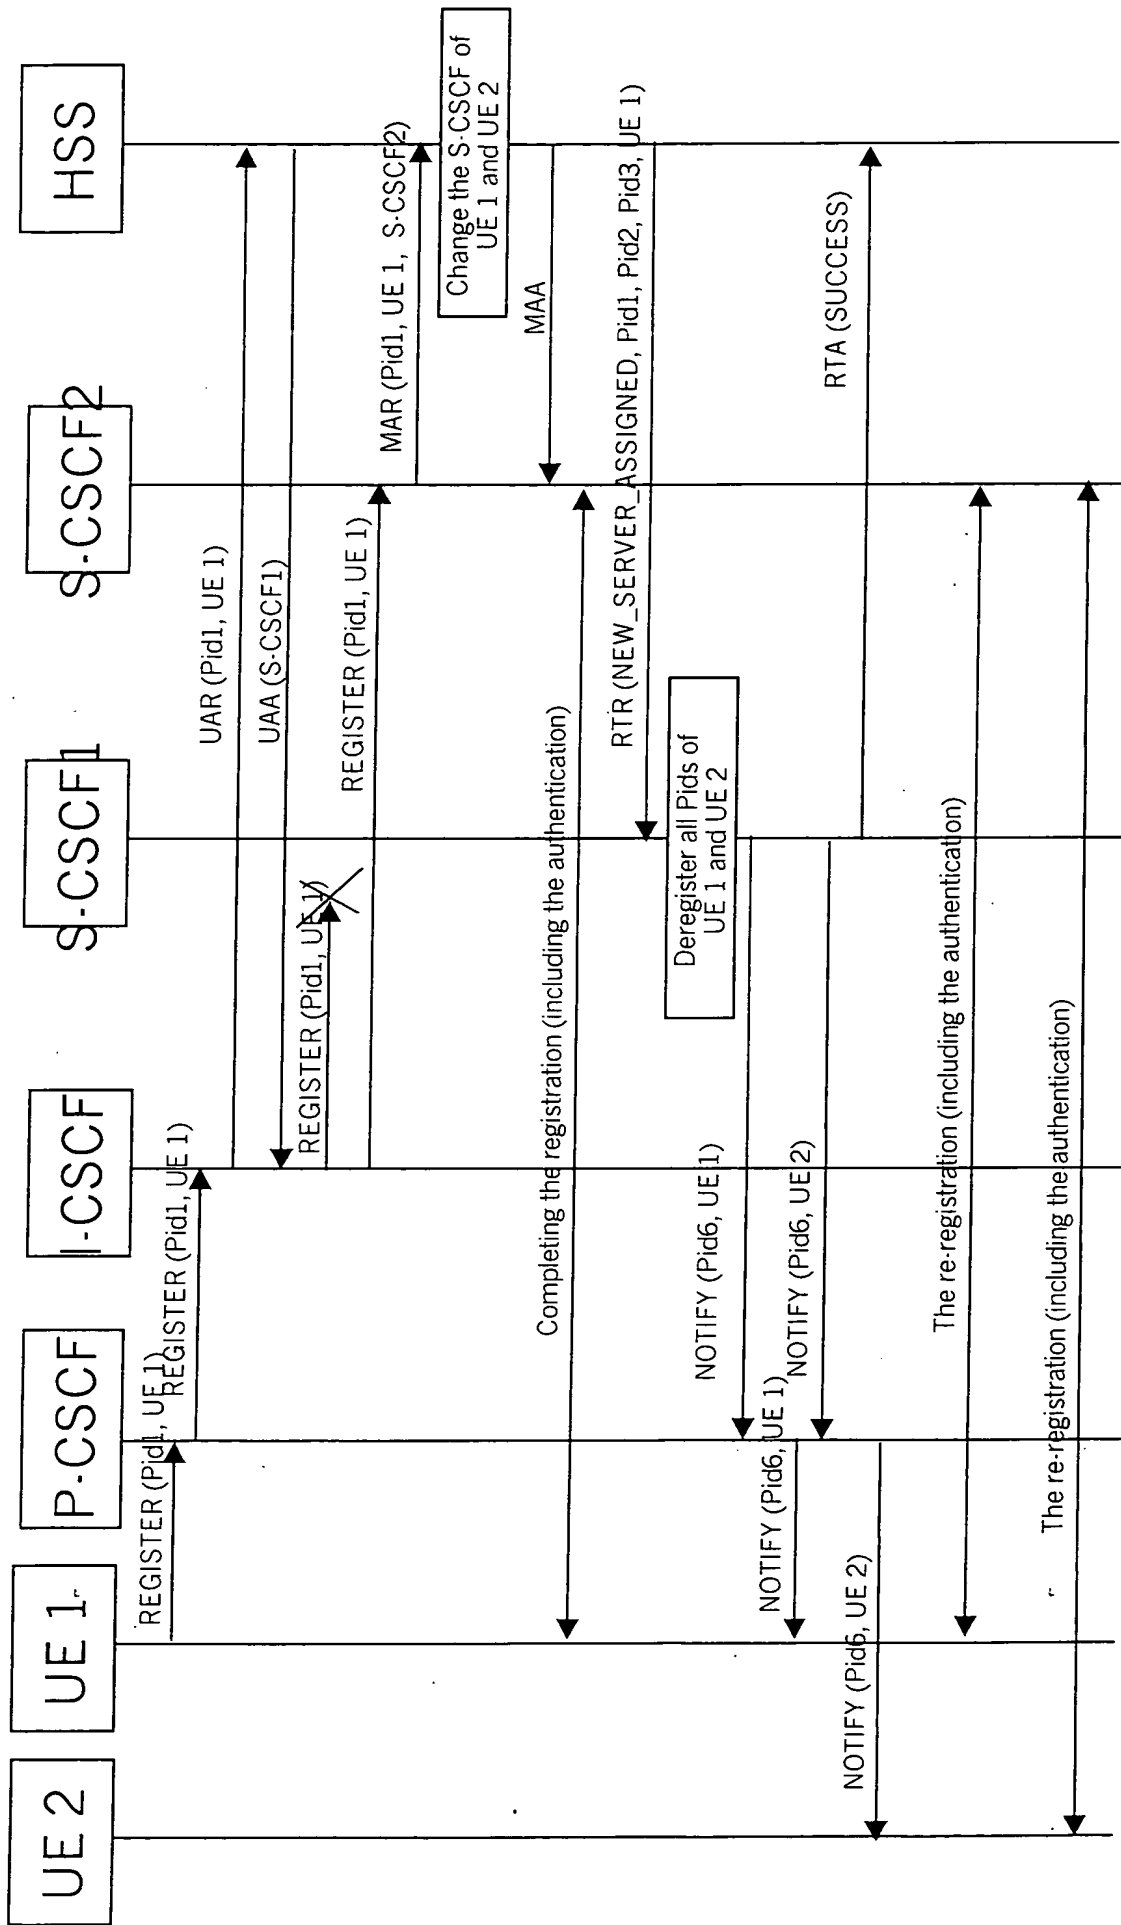

THIS PAGE BLANK (USPTO)